



**Adhesive Systems, Inc.**

An ISO 9001:2008 Certified Company

## MAXIMUM PERFORMANCE SERIES

### MP531006E

#### UV ADHESIVE

## TECHNICAL DATA SHEET

TDS #: MP531006E

UV Adhesive

#### DESCRIPTION

MP531006E is a high performance UV curing adhesive engineered to bond metals and plastics. It can be used in a variety of product assemblies and it promotes innovative design solutions. Our MP531006E is a leading performer when used for electronic and general industrial applications. This maximum performance adhesive has a deep cure and great flexibility. During in-line inspection this adhesive fluoresces a blue color when using a low intensity black light. MP531006E is often cured with an electroless lamp D, medium pressure metal halide lamp. This UV adhesive also works well with UV light emitted diodes (UV LED) at wavelengths of 365 nm to 395 nm. Design engineers select MP531006E for the optimum in finished product quality, reliability, performance, and cost effectiveness. MP531006E is an essential tool in improving overall product quality, lowering per unit cost, and reducing processing time.

#### PHYSICAL PROPERTIES (UNCURED):

Chemical Class	Acrylate
Solvent Content	None
Appearance	Colorless Liquid
Density, g/ml	1.02
Viscosity, 25 °C, 20 RPM	2800cp-4000cp
Flash Point °C	95

#### Benefits

- Superior Bond Strength
- Solvent Free
- Low Odor
- Improves Finished Product Quality
- Durable
- Good Impact and Vibration Resistance
- Easily Automated
- No Clean Up

#### PHYSICAL PROPERTIES (CURED):

Durometer Hardness	D30
Water Absorption, 2 hrs. @100 °C	4.7%
Water Absorption, 24 hrs. @ 25 °C	4.9%
Glass Transition Temperature, °C	19
Lap Shear Strength PSI Polycarb.	860
Dielectric Constant	3.2
Dielectric Strength, volts/mil	>400
Working Temperature °F	-60 to 300
Flexibility@RT	Yes
Blue Fluorescing	Yes

#### Substrate Applications

##### Plastics

Polyethylene, Polypropylene requires surface treatment such as corona, etc.

##### Metal


#### CURE SCHEDULE

Medium Pressure Metal Halide Flood Lamp Station @ 50mW/cm<sup>2</sup>  
 Fusion F 300 S Lamp D Conveyor @ 750 mW/cm<sup>2</sup>  
 Fixed time between 2 Glass Slides @ low intensity black light  
 Cure Depth @ 50 mW/cm<sup>2</sup> for 2 minutes  
 UV LED 365 nm to 395 nm

40 seconds  
 Belt Speed @ 20 FPM  
 1 second  
 0.7 inch  
 Time depends on the intensity and wavelength

#### Storage and Shelf Life

This UV Cure material should be stored in a dark place, above 0°C and below 30 °C. The shelf life is one year from the date of manufacture.

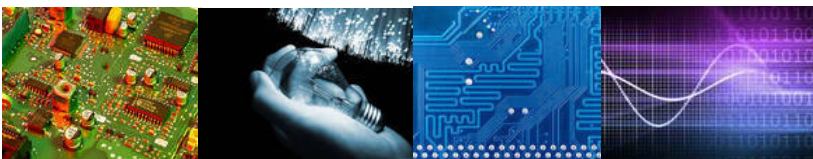

#### **Engineering Excellence**

For technical information and support call 1-800-552-0299 or visit our website at

**[www.instantca.com](http://www.instantca.com)**

### **Directions for Use**

- 1. This product cures at exposure to daylight. Minimize to expose during storage and handling.**
- 2. Surface of substrates should be clean and free from grease, mold release, or other contaminants.**
- 3. Cure speed is dependent on UV energy, intensity of UV Light, required depth of cure and percentage of light transmission of substrates.**
- 4. For the best performance, Fusion Lamp D or medium pressure metal halide should be used. Also, UVLED at 365 nm to 395 nm can be used.**
- 5. Allow cured parts to cool before testing to any service loads.**
- 6. Air inhibits a surface cure. To minimize this effect an inert gas such as nitrogen can be used or a higher intensity can be used.**